




# INTERIOR ACCESS PANELS

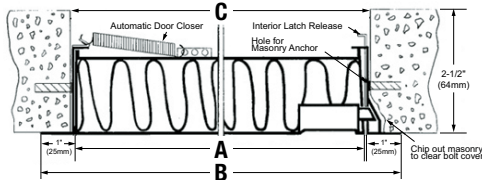

Wall Installation Models FD, FDSS, and HGFD

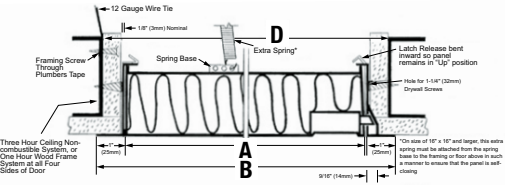

3-hour Ceiling Installation Models FD and FDSS

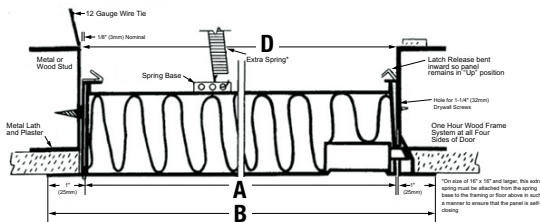

1-hour Ceiling Installation Models FD and FDSS



**UL Test Number:** R13067-1  
**WHI Test Number:** WHI-495-PSH-0163  
**California State Fire Marshall Number:** 3330-1223:100

## 1 OR 3 HOUR FIRE-RATED & INSULATED FLUSH ACCESS PANELS: FD Series

### FD: Standard Panel (Wall or Ceiling)

**Frame:** 16 gauge steel with a paintable 1" flange  
**Door:** 2" thick, insulated 20 gauge steel with continuous hinge  
**Finish:** Gray baked enamel primer



MODEL FD

### FDSS: Stainless Steel (Wall or Ceiling)

**Frame:** 16 gauge #4 finish stainless steel with 1" wall flange  
**Door:** 2" thick, insulated 20 gauge stainless steel mounted with continuous hinge  
**Finish:** #4 finish stainless steel

### HGFD: Heavy Gauge and Security (Wall)

**Frame:** 14 gauge with paintable 1" wall flange  
**Door:** 2" thick, insulated 14 gauge steel with continuous hinge  
**Finish:** Gray baked enamel primer (See also Security Panels Page)

### FDWB: Wallboard Bead (Wall or Ceiling)

**Frame:** 16 gauge with 1" drywall bead that can be taped and mudded for a smooth appearance  
**Door:** 2" thick, insulated 20 gauge steel with continuous hinge  
**Finish:** Gray baked enamel primer



MODEL FDWB

### FDPW: Plaster (Wall or Ceiling)

**Frame:** 16 gauge steel with 3/4" plasterguard  
**Door:** 2" thick, insulated 16 gauge steel with continuous hinge  
**Finish:** Gray baked enamel primer

**Automatic Closing:** Spring-assisted closer on all size panels with additional springs on models 16" or larger.

**Lock:** Recessed Universal Latch for turning or Key lock

**Options:** Galvanized Steel door and frame. 1 1/8" mortise preparation for cylinder lock by JL Industries.

### Door Sizes and Wall/Ceiling Openings

Dimensions in Inches • Weight in Pounds

A-Model Size Width x Height	B-Outside Frame Dimensions		C-Wall Opening Dimensions 1-Hour Ceiling Opening Dimensions 1 1/2-Hour UL "B" Rating 3-Hour Non-Combustible WH Label 1-Hour Combustible WH Label*		D-Ceiling Opening Dimensions 3-hour Ceiling Opening Dimensions 3-Hour Non-Combustible WH Label 1-Hour Combustible WH Label*		Shipping Weight			Latch(es)	
	Width	Height	Width	Height	Width	Height	FD	FDWB	FDSS		HGFD
8" x 8"	10"	10"	8 3/8"	8 3/8"	9 5/8"	9 5/8"	7 lbs.	7 lbs.	7 lbs.	11 lbs.	1
10" x 10"	12"	12"	10 3/8"	10 3/8"	11 5/8"	11 5/8"	9 lbs.	9 lbs.	9 lbs.	15 lbs.	1
12" x 12"	14"	14"	12 3/8"	12 3/8"	13 5/8"	13 5/8"	11 lbs.	11 lbs.	11 lbs.	17 lbs.	1
14" x 14"	16"	16"	14 3/8"	14 3/8"	15 5/8"	15 5/8"	15 lbs.	15 lbs.	15 lbs.	22 lbs.	1
16" x 16"	18"	18"	16 3/8"	16 3/8"	17 5/8"	17 5/8"	16 lbs.	16 lbs.	16 lbs.	24 lbs.	1
18" x 18"	20"	20"	18 3/8"	18 3/8"	19 5/8"	19 5/8"	19 lbs.	19 lbs.	19 lbs.	30 lbs.	1
20" x 30"	22"	32"	20 3/8"	30 3/8"	21 5/8"	31 5/8"	34 lbs.	34 lbs.	35 lbs.	51 lbs.	1
22" x 30"	24"	32"	22 3/8"	30 3/8"	23 5/8"	31 5/8"	32 lbs.	32 lbs.	33 lbs.	53 lbs.	1
22" x 36"	24"	38"	22 3/8"	36 3/8"	23 5/8"	37 5/8"	40 lbs.	40 lbs.	41 lbs.	58 lbs.	2
24" x 24"	26"	26"	24 3/8"	24 3/8"	25 5/8"	25 5/8"	27 lbs.	27 lbs.	28 lbs.	47 lbs.	1
24" x 36"	26"	38"	24 3/8"	36 3/8"	25 5/8"	37 5/8"	42 lbs.	42 lbs.	43 lbs.	60 lbs.	2
24" x 48"	26"	50"	24 3/8"	48 3/8"	-	-	57 lbs.	57 lbs.	59 lbs.	85 lbs.	2
30" x 30"	32"	32"	30 3/8"	30 3/8"	-	-	44 lbs.	44 lbs.	45 lbs.	62 lbs.	2
32" x 32"	34"	34"	32 3/8"	32 3/8"	-	-	54 lbs.	54 lbs.	55 lbs.	81 lbs.	2
36" x 36"	38"	38"	36 3/8"	36 3/8"	-	-	61 lbs.	61 lbs.	63 lbs.	92 lbs.	2
36" x 48"	38"	50"	36 3/8"	48 3/8"	-	-	75 lbs.	75 lbs.	78 lbs.	114 lbs.	2

Note: Warnock Hersey Fire-Rated Ceiling Label for Sizes up to 24" x 36" Only.

\* 1 or 3 Hour Fire Rating is Determined by the Installation Technique

Custom Sizes and Modifications Available Upon Request